



OBS12300HR (12V 300W)

High Rate VRLA Battery

OSONIX High Rate VRLA has High-Density AGM technology, Manufactured from high purity lead (99.99%), its advanced lead tin calcium alloy reduces grid corrosion and promotes long battery life for up to 12 years.

► Features

- Absorbed Glass Mat technology (AGM) for greater than 99.99% recombination efficiency
- Special designed thin grids for optimized high power density
- Oversized partition intercells welds, providing low resistance connections & minimal power loss
- Compliance with IATA/ICAO Special Provisions Compliance A67 (No restrictions for rail, road, sea & air transport)
- Superior performance at high rates of discharge & recharge


► Applications

- Uninterruptible power supply (UPS)
- Hospitals & Testing Laboratories
- Telecommunications
- Data Centers
- Banks & Financial Centers
- Power Generation Plants
- High Power Backup Supply



SPECIFICATIONS Standard @ 25°C (77°F)		
Nominal Voltage		12 V
Nominal Rate (15 min to 1.67 V/cell)		324.6 W/cell
Nominal Capacity (20 hrs. to 1.80 V/cell)		82 Ah
Rated capacity	83.4 Ah	(20hrs, 4.17 A, 1.75V/cell)
	77.28 Ah	(8hrs, 9.66 A, 1.75V/cell)
	65.7 Ah	(3hrs, 21.9A, 1.75V/cell)
	57.5 Ah	(1hr, 57.5A, 1.67V/cell)
Max. Discharge Current		1230 A
Internal Resistance		4.5 mΩ
Operating Temp. Range	Discharge	-15 to 50 °C (5 to 122 °F)
	Charge	0 to 40 °C (32 to 104 °F)
	Storage	-15 to 40 °C (5 to 104 °F)
Nominal Operating Temp. Range		25 ± 3 °C (77 ± 5 °F)
Short Circuit Current		2100 A
Max. Charging Current		24.0 A
Charge voltage	Float	13.5 V
	Temp. Coefficient	-3 mV / cell / °C
	Equalization	14.1 to 14.4 V
Self Discharge		≤3% /month

PHYSICAL SPECIFICATION		
Dimensions	Length	260 ±2 mm (10.2 in)
	Width	168 ±2 mm (6.61 in)
	Height	208 ±2 mm (8.19 in)
	Total Height	211 ±2 mm (8.31 in)
Weight		24.0 Kg (52.9 lb)
Terminal		M6
Container Mat. (Flame retardant)		ABS UL94 V-0 (Optional V0)
Recommended Torque		4 Nm (35.40 in-lb)
Maximum allowable torque		5.4 Nm (47.79 in-lb)

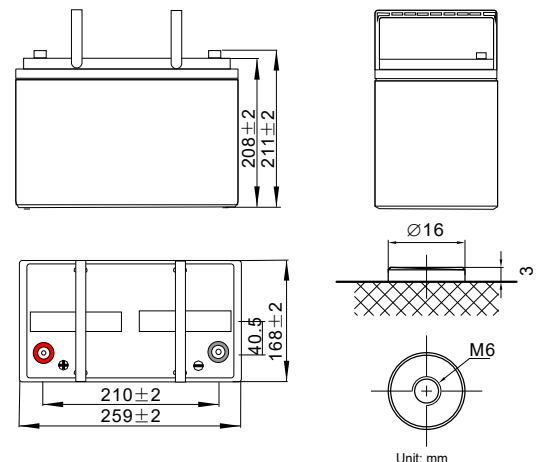

Compliance with:
IEC 60896 standard
CE, UL 1989, UL94 HB
IATF16949, OHSAS 18001, ISO 9001, ISO 14001 certified production



OBS12300HR (12V 300W)

High Rate VRLA Battery




CONSTANT CURRENT DISCHARGE (AMPERES) AT 25°C (77°F)

Final V. / Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	192.4	146.1	126.0	110.2	85.0	63.6	51.2	29.1	20.7	16.2	13.5	11.6	9.19	7.70	4.02
1.80V/cell	220.7	161.0	138.1	118.8	89.5	65.9	52.9	30.0	21.4	16.7	13.9	12.0	9.46	7.86	4.10
1.75V/cell	251.1	180.8	150.2	126.0	93.3	68.0	54.3	30.9	21.9	17.1	14.2	12.3	9.66	8.00	4.17
1.70V/cell	276.4	196.0	160.1	134.1	98.1	70.9	55.9	31.4	22.4	17.6	14.6	12.5	9.82	8.14	4.24
1.67V/cell	305.8	213.4	171.2	140.2	102.3	73.0	57.5	32.0	22.8	17.8	14.8	12.6	9.99	8.28	4.31
1.60V/cell	336.2	230.3	180.7	147.6	106.3	75.7	58.8	32.6	23.1	18.2	15.1	12.9	10.2	8.43	4.36


CONSTANT POWER DISCHARGE (WATTS/CELL) AT 25°C (77°F)

Final V. / Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	374.2	285.7	247.8	217.9	168.9	127.0	102.5	58.4	41.9	32.9	27.4	23.7	18.8	15.8	8.30
1.80V/cel	425.0	311.8	269.0	232.7	176.4	130.6	105.2	59.9	42.9	33.7	28.1	24.3	19.3	16.1	8.42
1.75V/cell	478.5	346.7	290.0	244.5	182.2	133.6	107.2	61.3	43.7	34.3	28.6	24.7	19.6	16.3	8.53
1.70V/cell	520.7	371.7	305.4	257.5	189.6	137.9	109.5	61.9	44.4	34.9	29.1	25.0	19.8	16.5	8.61
1.67V/cell	571.4	401.7	324.6	267.6	196.7	141.4	112.0	62.7	44.9	35.3	29.4	25.2	20.0	16.7	8.72
1.60V/cell	621.1	429.0	339.1	279.0	202.3	145.1	113.5	63.3	45.1	35.7	29.7	25.5	20.2	16.8	8.73


Discharge Characteristics

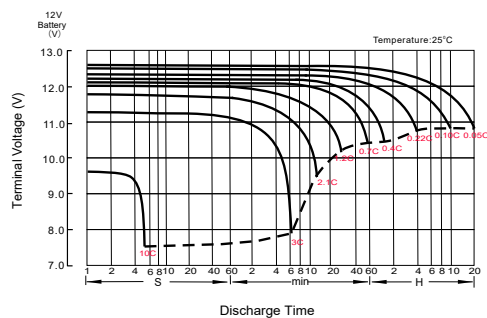


Float Charging Characteristics

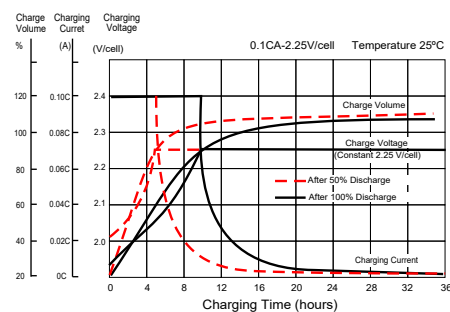

Temperature Effects in Relation to Battery Capacity

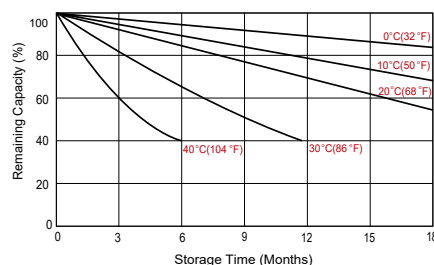

Temperature Effects on Long Term Float Life

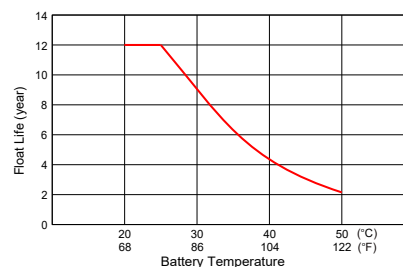

* Product specifications are subject to change without notice.

* US-V2509-REV-1.01

©2025, OSONIX



Osonix

www.osonix.com

info@osonix.com

Kenjitsu USA

3111 Camino Del Rio North Suite 400
Mission Valley, San Diego CA 92108



AUTHORIZED DISTRIBUTOR

(619) 431 4777

@sales@kenjitsuusa.com

www.kenjitsuusa.com