



LFP48150LCD

Lithium Iron Phosphate LiFePO₄ Battery



Extended Cycle Life

3500 cycles @ 100% DOD - Cost-effective investment.



Long Life

Its stable chemistry ensures maintenance-free operation and enhanced safety, while extending overall lifespan.



Complete Built-in Protection

Intelligent Battery Management System (BMS) with safeguards against overcharge, over-discharge, overcurrent, and other fault conditions.



3 Year Warranty



Fast Charging

Saves time and boosts productivity by minimizing recharge downtime.



Extreme Heat Tolerance

Exceptional high-temperature performance with minimal capacity degradation.



Ultra-lightweight + High Energy

OSONIX Lithium delivers higher Wh/kg energy density while weighing just 1/3 of equivalent SLA (Sealed Lead-Acid) batteries.



Superior Energy Retention

Up to >12 month energy retention, extremely low self-discharge rate (>3% per month) zero sulfation risk (non-lead chemistry).



Anti-Theft Protection System

BMS lockout mode: Immediately cuts power supply and activates audible alarm upon tampering detection.

PHYSICAL SPECIFICATIONS

Dimensions	Width	17.4 in (442 mm)
	Deep	20.47 in (520 mm)
	Height	7.79 in (198 mm)
Rack units		4.5U
Weight		143 lb (65 kg)
Terminal		M6
Container Mat.		Oven-Cured Stainless Steel
IP protection		IP30

FUNCTIONS

LCD Screen	Real-Time Battery Module (& Cell) Status
Communication ports	RS232, RS485
LED status indicator	ALM / RUN / SOC%
Parallel communication	Máx. 15 units
BMS (Alarm & Protection)	Against overcurrent, short circuit, overvoltage, overtemperature, low temperature.
External protection / disconnection	Thermal-Magnetic Circuit Breaker

CONDITION OF USE (ENVIRONMENT)

Temperature	Charge	32°F - 122°F (0°C - 50°C)
	Discharge	-4°F - 140°F (-20°C - 60°C)
	Storage	-4°F - 140°F (-20°C - 60°C)
Altitude (without derating)		≤ 2000m
Humidity		≤ 95%
Cooling System		Using heat sinks

APPLICATIONS



Telecom



UPS



Renewable Energy



Emergency Lighting

TECHNICAL SPECIFICATIONS

Nominal Voltage		48V
Nominal Capacity		150Ah
Nominal Energy Capacity		7200Wh
Voltage Range		37.5 - 54.7V
Charging Voltage	Floatation	51 - 51.7V
	Equalization	52.5 - 54V
Charging current		30A
Max. Continuous Charging current		100A
Discharge current		30A
Max. Continuous discharge current		100A
Cycles (25°C, 100% DOD)		3500 Cycles
Final voltage		42V
Energy charging efficiency (0.2C @ 25°C)		≥95%
Initial resistance (25 °C, 50% SOC)		≤15mΩ
Self-discharge		≤3%
Useful life		≥15 years



Certified to:
IEC 62619:2017 (Clause 5.2.3 compliance)
CE Directive 2014/35/EU
UN Manual of Tests and Criteria, Rev. 7
ISO 9001:2015 & ISO 14001:2015*

LFP48150LCD

Lithium Iron Phosphate LiFePO₄ Battery




CONSTANT CURRENT DISCHARGE (AMPERES) AT 77°F (25°C)

Final voltage/Time	2 h	3 h	5 h	8h	10h	15h	20h
42	75	50	30	18.75	15	10	7.5


CONSTANT POWER DISCHARGE (WATT/CELL) AT 77°F (25°C)

Final voltage/Time	2 h	3 h	5 h	8h	10h	15h	20h
42	3600	2400	1440	900	720	480	360


Number of cycles VS DOD @ 77°F (25°C) , 0.5C

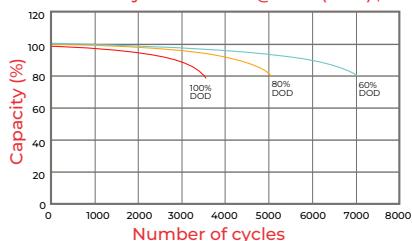


Discharge Performance at R.T.

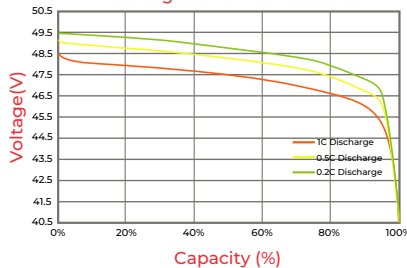


Cycle Life in Relation to Temperature

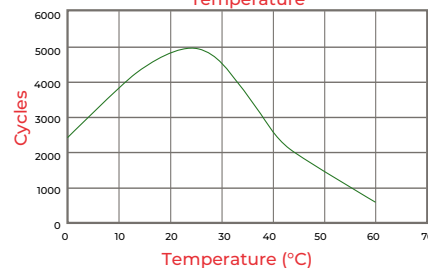


Charging curve vs. Temperature ranges

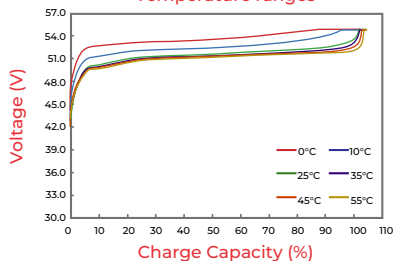


Discharge curve vs. Temperature ranges

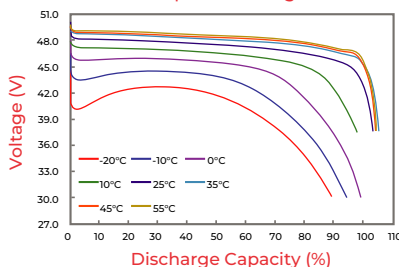




Temperature effects on capacity at 0.5C

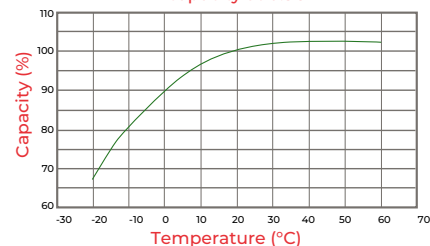

Battery Capacity (SOC) Vs. Open Circuit Voltage (OCV)

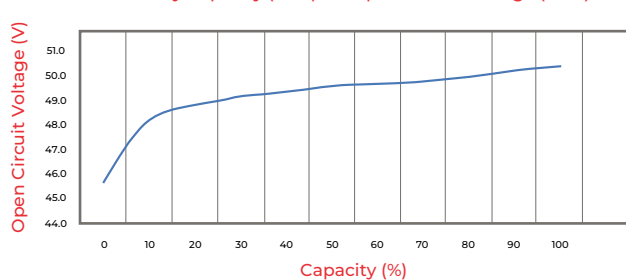

Charging capacity (%) Vs. Charging time @77°F (25°C)

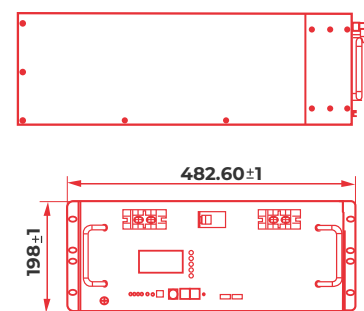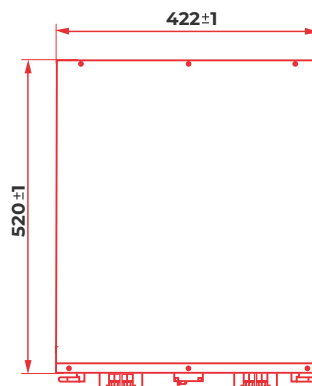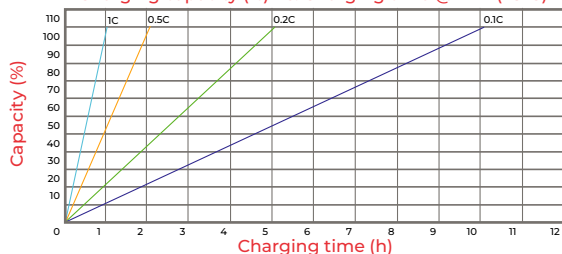

Osonix

www.osonix.com
info@osonix.com

* Product specifications are subject to change without notice.
* US-V2510-REV 1.03

Kenjitsu USA

3111 Camino Del Rio North Suite 400
Mission Valley, San Diego CA 92108



AUTHORIZED DISTRIBUTOR

(619) 431 4777

sales@kenjitsuusa.com

www.kenjitsuusa.com